




# Omnidirectional Antennas KA140.3



The omnidirectional antenna KA140.3 is designed for base radiostations working in bands of 146-158 MHz. The antenna has an omnidirectional radiation pattern with the gain of 3 dBd and is suitable for the top-mounting. The antenna is broadband and that is why it is suitable for duplex operations.

As for construction, the antenna is designed as a coaxial dipole put in a laminate case. It is connected to the coaxial cable by the coaxial plug "N" type which is soldered together with this antenna.

It is possible to order holders produced of zinc-plated steel for towers' diameters of 30 to 180 mm.

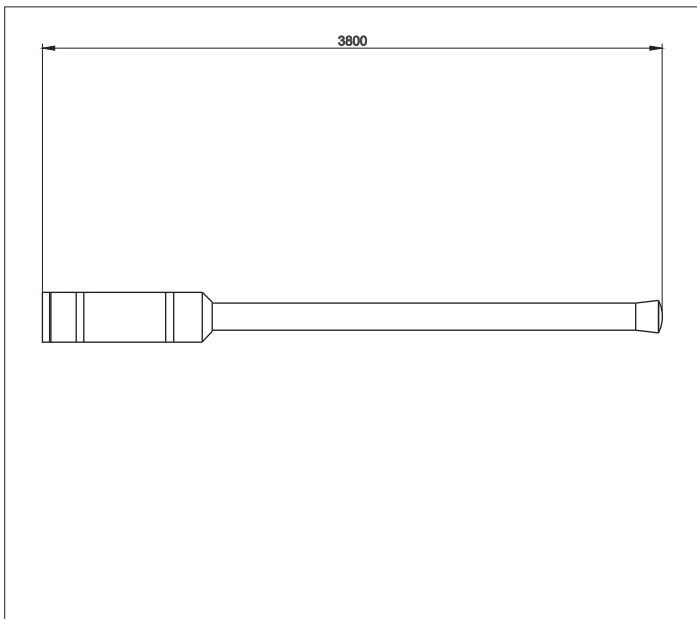

## ELECTRICAL PARAMETERS

Frequency range [MHz]	146-158
Gain [dBd]	3
Radiation angle in E-plane [°]	30
Radiation angle in H-plane [°]	omnidirectional
VSWR	<1.5
Polarization	Vertical
Impedance [Ohm]	50
Max. Input power [W]	200
Antistatic protection	All metal parts DC-grounded (shows as DC-short)

## MECHANICAL PARAMETERS

Connection	N female
Wind Surface/ with 15 mm icing [m²]	0.100 / 0.22
Wind Load/ with 15 mm icing [N]	128/ 240 @ 150 km/h
Length [mm]	3800
Weight [kg]	2.5
Mouting	Supplied with mast bracket suiting 30-76 mm dia.mast

## RADIATION PATTERNS

E-plane	015DE22
H-plane	000ND00

Radiation Patterns code is generated with VAS9TOOL software

## SWR KA140.3

